


Multi-Fire[®] SL 60" Slim Linear Electric Fireplace

PLF6014-XS

Enhance your room with a fireplace that fits right into your existing walls

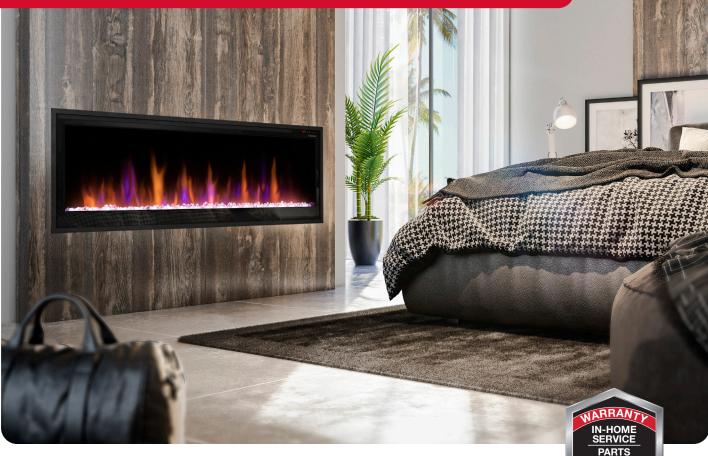

With an incredibly shallow depth the Slim Linear allows you to incorporate a stylish electric fireplace into an existing 2x4 inch exterior framing. Make the most of any space with the Slim Linear Electric fireplace.



Multi-Fire® SL 60" Slim Linear Electric Fireplace





NEW! Flame Connect app

Download the Flame Connect app on your mobile device and create an account. With the app you can add an extra level of personalization, such as saving customized mood settings.



120 Volts | 1,500 Watts | 5,000 BTU | 12.5 Amps

| Model #w | Description | Lbs / Kg (packaged) | | | Carton Dimensions (WxHxD) | | Cube | |
|------------|---------------------------------------|------------------------------|--------------|-------|---------------------------|---------------------|------|----------------|
| | | | | | Inches | cm | ft³ | m ³ |
| PLF6014-XS | 60" Slim Linear Electric Fireplace | 75.2 / 34.1 (87.1 / 39.5) | 781052137288 | 2 yr. | 70 x 24-5/8 x 9-1/2 | 177.8 x 62.5 x 24.1 | 9.5 | 0.27 |
| PLFXSPLUG | Plug Kit | 0.6 / 0.29 (0.7 / 0.34) | 781052139534 | | 12 x 8 x 2 | 30.5 x 20.3 x 5.1 | 0.1 | 0.0031 |

Specifications, finishes and dimensions are subject to change. †Limited warranty. ©2023 Glen Dimplex Americas.



PLF6014-XS

FEATURES

Multi-Fire® SL Flame Effect

A Large, high-contrast flames feature a multi-layered color effect that creates a sense of depth.

Media Accent Colors

Choose from a variety of brilliant color themes or cycle through a range of colors using the custom mode, selecting on the hue of your choice.

Customizable Flame

Choose from orange, blue, and yellow flames or from the combined multi-color flame themes. Adjust the speed of the flame to create the perfect atmosphere to suit your mood or room. Color settings can be controlled independently or combined in one of the seven preset options.

Full Viewing Area

A slim size doesn't mean sacrifice. This smart design delivers an impressive viewing height of 14" and includes mirror technology that creates a grand illusion of depth.

♦ Slim Design

Installs flush into a 2"x4" wall for a seamless look or can be wall-mounted (bracket included) for quick and easy installation.

Flush Framing

Removable factory-installed trim allows finish material right to the edge for a clean, flush finish.

Ambient Light Sensor

Automatically adjusts firebox light to suit the room day to night.

Powerful Heating J

Powerful fan-forced heater provides on demand heat for up to 1,000 square feet. Can be used as primary or secondary heat depending on room requirements.

Heat Management

Enjoy the ambiance of a fire during the warmer months by deactivating the heater via the controls, or hard disconnect the heater during installation where heat is not required.

Smart Self-Diagnostics

Integrated self-diagnostics that simplify troubleshooting and improve service.

Hardwire or Plug-in

Hardwire to 120V power supply or purchase an optional 120V plug-in cord kit (PLFXSPLUG).

SE-568-R03-02082023

Welcome to Flame Connect

Control your electric fireplaces, from the palm of your hand.



Connect your electric fireplaces

Add as many fireplaces as you like to the Flame Connect App.



Personalize your product

Change modes and settings on your fireplace to suit your mood.




Secure your device

Take ownership of a product to prevent unauthorized access.



NEW! Flame Connect app

Download the Flame Connect app on your mobile device and create an account. With the app you can add an extra level of personalization, such as saving customized mood settings.

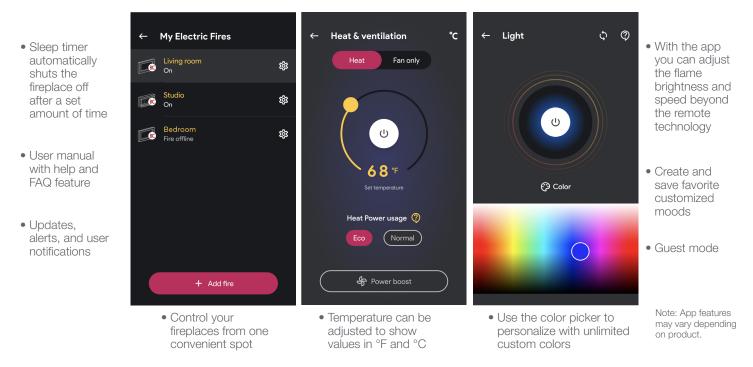

For additional information, visit dimplex.com/fcapp

Available in the App Store and Google Play



(3) A BRAND OF GLEN DIMPLEX AMERICAS







Multi-Fire[®] SL 60" Slim Linear Electric Fireplace

PLF6014-XS

Product Dimensions:

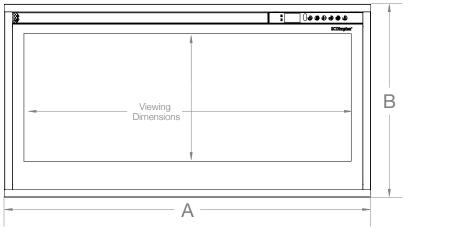




| Product | A WIDTH (in/cm) | B HEIGHT (in/cm) | C DEPTH (in/cm) | VIEWING DIMENSION - WxH (in/cm) |
|------------|-----------------|------------------|-----------------|---------------------------------|
| PLF6014-XS | 61-1/4 (155.6) | 19-4/8 (49.8) | 3-7/8 (9.8) | 57-1/4 x 12-5/8 (145.5 x 32.2) |

Framing:

Installation - 2 Mounting Options

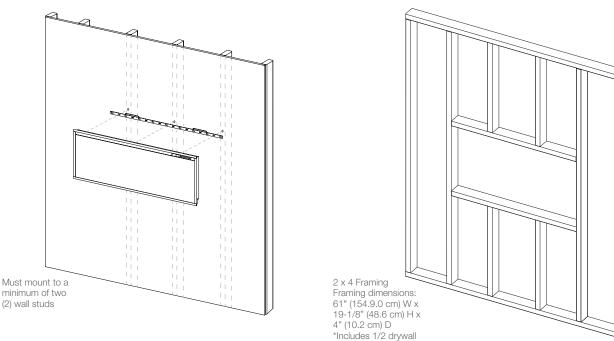

NOTE:

The Firebox is not load bearing. Do not stack weight of the frame on top of the firebox.

It is recommended that the bottom of the unit be mounted between 20 in. (50 cm) and 40 in. (100 cm) from the ground to maintain an optimized viewing angle of the flame.